

MICHELIN X[®] TWEEL[™] TMF

**AIRLESS RADIAL TIRE FOR HIAB MOFFETT M8 NX
MODEL RANGE TRUCK-MOUNTED FORKLIFTS**



The Michelin X[®] TWEEL[™] TMF airless radial tire was specially developed to replace pneumatic tires on Hiab MOFFETT M8 NX model range. The TWEEL[™] TMF tire is designed to provide an extra long service life and outstanding stability allowing companies to finally take control of their deliveries and avoid delays. There are no flats to worry about – just bolt and go.



MICHELIN X® TWEEL™ TMF

AIRLESS RADIAL TIRE FOR HIAB MOFFETT M8 NX
MODEL RANGE TRUCK-MOUNTED FORKLIFTS

Designed for 3-4X the life
of a pneumatic tire

- 26/32" extra-deep tread depth

Stone ejection and
mud evacuation


- Flared lateral grooves and stepped tread edges

Robust attachment
to machine

- 10 hole heavy gauge steel hub

Excellent comfort and
stability (less bounce)

- Innovative high strength polyresin spoke design
- No flat or under-inflated tires to slow down your deliveries
- Outstanding stability and handling contributes to higher productivity
- Reduced "bounce" compared to pneumatic or solid tires
- Less marking on concrete surfaces
- Fits front and rear positions

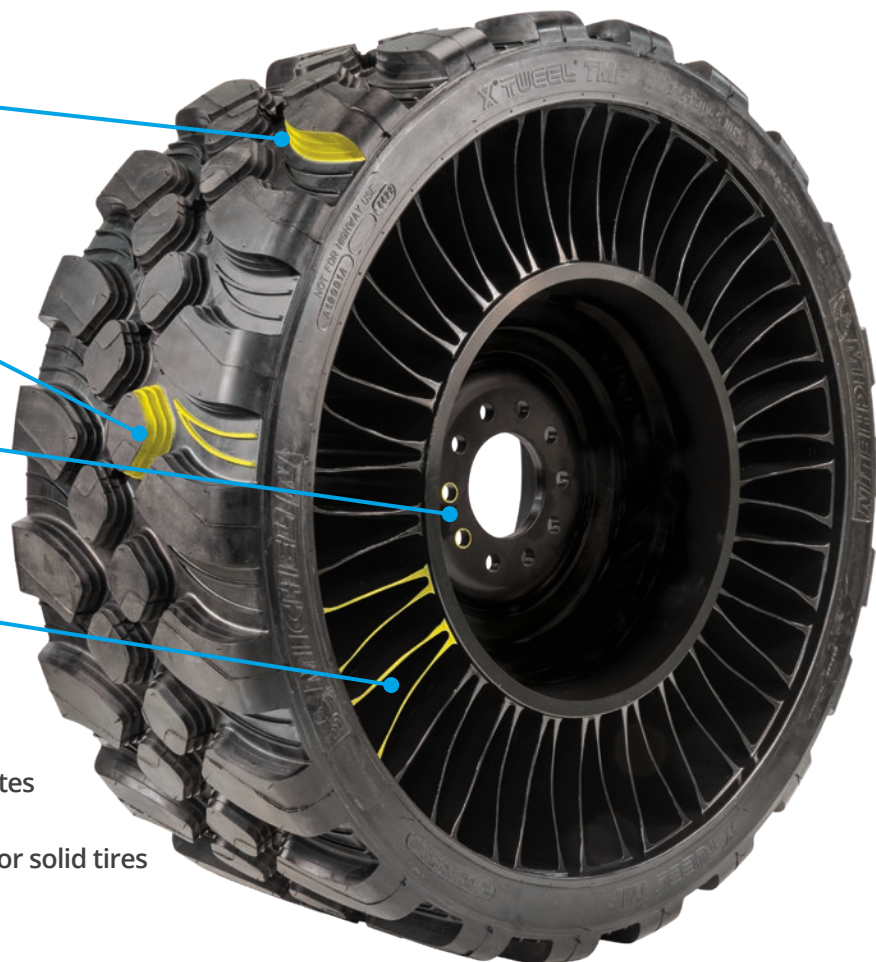

Model	Bolt Pattern	Oper. Weight	Travel	Wheel-base	OE Front Size	OE Rear Size	TWEEL						
							Front Size / Offset	MSPN (Front)	Hiab Part # (Front)	Rear Size / Offset	MSPN (Rear)	Hiab Part # (Rear)	Tweel Ballast Required*
MOFFETT M5 50.3 NX	10-140	5290	2-Way	68	31x15.5-15	31x15.5-15	31.5x13N16.5 / +13mm	15204	060.999.0127	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M5 50.3P NX	10-140	6140	2-Way	68	31x15.5-15	31x15.5-15	31.5x13N16.5 / +13mm	15204	060.999.0127	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M5 50.4 NX	10-140	5990	4-Way	68	31.5x13-16.5	31x15.5-15	31.5x13N16.5 / +46mm	05972	060.999.0126	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M5 50.4P NX	10-140	6990	4-Way	68	31.5x13-16.5	31x15.5-15	31.5x13N16.5 / +46mm	05972	060.999.0126	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M8 55.3 NX/NX2	10-140	6340	2-Way	65.5	31x15.5-15	31x15.5-15	31.5x13N16.5 / +13mm	15204	060.999.0127	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M8 55.3P NX/NX2	10-140	7240	2-Way	73.5	31x15.5-15	31x15.5-15	31.5x13N16.5 / +13mm	15204	060.999.0127	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M8 70.3 NX/NX2	10-140	6170	2-Way	73.5	31x15.5-15	31x15.5-15	31.5x13N16.5 / +13mm	15204	060.999.0127	31.5x13N16.5 / +13mm	15204	060.999.0127	n/a
MOFFETT M8 55.4 NX/NX2	10-140	7120	4-Way	65.5	31.5x13-16.5	31x15.5-15	31.5x13N16.5 / +46mm	05972	060.999.0126	31.5x13N16.5 / +13mm	15204	060.999.0127	Front Position
MOFFETT M8 55.4P NX/NX2	10-140	8670	4-Way	73.5	31.5x13-16.5	31x15.5-15	31.5x13N16.5 / +46mm	05972	060.999.0126	31.5x13N16.5 / +13mm	15204	060.999.0127	Front Position
MOFFETT M9 60.3 NX	10-140	7230	2-Way	74.25	31.5x13-16.5	31.5x13-16.5	31.5x13N16.5 / +13mm	15204 (R)	060.999.0127 (R)	31.5x13N16.5 / +13mm	15204 (R)	060.999.0127 (R)	n/a

* Ballast Kit: Hiab Part number: 090.280.0019. NOTE: Installation of Michelin X® Tweel™ TMF on the front of the 4-Way models noted above requires installation of an additional wheel ballast kit which will be made available for purchase separately through Hiab USA Inc. Spare Parts.

(R) Reverse mount: Tweels are to be mounted reversed with the barcode label on the Tweel hub facing outward away from the machine.

Michelin North America Inc., One Parkway South, Greenville, SC 29615
Michelin North America (Canada) Inc., 2500 Daniel Johnson Blvd., Suite 500, Laval (QC) H7T 2P6

Copyright © 2024 Michelin North America, Inc. All rights reserved. | © 2024 MNA(CJ). All rights reserved. | An Equal Opportunity Employer | (BWA 02/19/25)



tweel.michelinman.com
business.michelinman.com

